

m o o o i

## Starfall Light

FRONT



Live under the stars with Starfall Light by Front! The Starfall Light is a circular suspension light with a contemporary twist. Punctuated with 30 LED light sources, this upside-down chandelier brings perpetual star fall in your home. Thanks to 30 slim arms of different lengths, it not only resembles falling stars but also a starry night sky with dots of light at varying heights. A brand-new constellation waiting to be discovered! Installation is a breeze, thanks to the arms already in place, so you can enjoy your falling stars within moments.

---

### *Detailing*



With the Starfall Light, you can go to sleep under the stars every night. Or dine with the watchful stars above you.

---


### *Colours*



Black

# Starfall Light / 30

## Dimensions

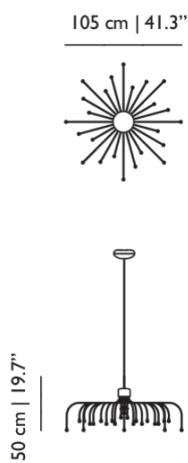

## Product

**WIDTH** 105cm | 41.3"  
**HEIGHT** 50cm | 19.7"  
**DEPTH** 105cm | 41.3"  
**DIAMETER** 105cm | 41.3"  
**WEIGHT NETTO** 2.9kg | 6.39lbs

## Packaging

**WIDTH** 64cm | 25.2"  
**HEIGHT** 30cm | 11.8"  
**CUBAGE** 0.22m<sup>3</sup> | 7.8ft<sup>3</sup>  
**LENGTH** 115cm | 45.3"  
**WEIGHT** 7.5kg | 16.53lbs

## Technical CE / UL

### MATERIAL

Powdercoated Stainless Steel and Poly Carbonate

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE INCLUDED

Yes

### INPUT VOLTAGE

110-270V

### MAX POWER CONSUMPTION

15W

### LIFETIME

50000 hours

### CABLE LENGTH

250cm | 98.4"

### COLOUR TEMPERATURE

2700 K (max)

### LIGHT OUTPUT

1200 lm

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

30

### FREQUENCY

50/60

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Black

### CANOPY

Pebble III Black, ABS

### CRI

91

### DIMMING & LIGHTING CONTROL

Wireless Wall Switch (dimmer), DALI dt6, Push / Pulse dim on Line Voltage, Smart Home Integration (Zigbee), Mains / ELV dimming is not possible

See last page for more information about the dimming possibilities.



## Energy Label information

**TYPE OF LIGHT SOURCE**

LED

**TYPE OF LIGHT SOURCE**

DLS

**COLOUR-TUNEABLE LIGHT SOURCE**

No

**ENERGY CONSUMPTION IN ON-MODE (KWH/1000 H)**

15 kWh

**USEFUL LUMINOUS FLUX (ΦUSE)**

1200 lm

**ON-MODE POWER (PON)**

15W

**COLOUR RENDERING INDEX, ROUNDED TO THE NEAREST INTEGER, OR  
THE RANGE OF CRI-VALUES THAT CAN BE SET**

91

**CHROMATICITY**

x: 0.4578; y: 0.4044

**LIGHTING TECHNOLOGY USED**

LED

**LAMPHOLDER**

LED (Solid state)

**DIMMABLE**

Yes

**ENERGY EFFICIENCY CLASS**

G

**CORRELATED COLOUR TEMPERATURE**

2700 K (max)

**LIFETIME**

50000 hours

**BEAM ANGLE IN DEGREES, OR THE RANGE OF BEAM ANGLES THAT CAN  
BE SET**

27

## *Dimming & Lighting Control*

### *Wireless Wall Switch (dimmer)*

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The Wall Switch can also be integrated in existing System 55 (i.e. Gira and Jung) or Decora style wall switches. Once the radio device is installed you will also have the possibility to control your light fixture with the Casambi App available in the Google Play and Apple app store. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: 30 CE, 30 UL

---

### *DALI dt6*

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: 30 CE, 30 UL

---

### *Push / Pulse dim on Line Voltage*

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: 30 CE, 30 UL

---

### *Smart Home Integration (Zigbee)*

This light fixture can seamlessly integrate into a Zigbee 3.0-based smart home network, including Philips Hue, Amazon Alexa, Google Home, Ikea Tradfri and Homey. This integration allows for wireless control and compatibility with other smart home systems, without the need to change your home's wiring. To enable this, simply add a Zigbee converter to your luminaire. We recommend the Sunricher Zigbee to Dali Converter for its reliability and compatibility with the US 110 voltage or the Osram 4062172044776 Zigbee 3.0 DALI Converter LI for 210-220V. Please note that this converter is sold by third-party vendors and not directly by Moooi and this should be installed by a professional electrician.

Compatible models: 30 CE, 30 UL

---

## *Mains / ELV dimming is not possible*

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: 30 CE, 30 UL

---