
moooi

Raimond II Tensegrity

RAIMOND PUTS

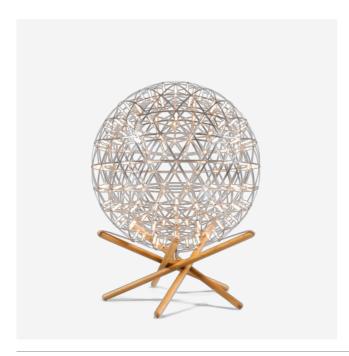


The Raimond Tensegrity is a floor lamp made from elegant metal, complemented with the sturdy earthiness of wood. Tensegrity is a term that was first described by Buckminster Fuller as an architectural term. It refers to the interconnected wooden structure that uses tension and pressure to keep its shape. The beauty of the Raimond Tensegrity lies not only in its contrasting materials, but also in the trigonometric harmony of both structures. Mathematical perfection times two.

Detailing



Raimond Puts never saw his final design. But, together with Raimond's wife, artist & designer Tis Ernst, Moooi completed the Raimond Tensegrity.

Colours



Stainless steel

Raimond II Tensegrity / Raimond II Tensegrity, R61

Dimensions

61cm | 24"





80cm | 31.5"

Product

width 61cm | 24" HEIGHT 80cm | 31.5" DEPTH 61cm | 24" DIAMETER 61cm | 24" WEIGHT NETTO 10kg | 22.05lbs

Packaging

width $75 \mathrm{cm} \mid 29.5"$ Height $75 \mathrm{cm} \mid 29.5"$ Cubage $0.42 \mathrm{m}^3 \mid 14.9 \mathrm{ft}^3$ Length $75 \mathrm{cm} \mid 29.5"$ Weight $10 \mathrm{kg} \mid 22.05 \mathrm{lbs}$

Technical CE / CU

MATERIAL

Stainless Steel Sphere (indoor use, not resistant to marine environemts) with PMMA lenses, wooden legs and leather straps

ENERGY LABEL

B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

MAX POWER CONSUMPTION

17W

LIFETIME

50000 hours

CABLE LENGTH

500cm | 196.9"

COLOUR TEMPERATURE

2523 K (max)

All directions

DIMMING & LIGHTING CONTROL

Dimmer on power cord

See last page for more information about the dimming possibilities.

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

162

FREQUENCY 50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

SWITCH

In line dimmer switch integrated in power supply

housing

CRI 92

LIGHT OUTPUT

1134 lm

Raimond II Tensegrity / Raimond II Tensegrity, R89

Dimensions

89cm | 35"





Product

WIDTH 89cm | 35" **HEIGHT** 113cm | 44.5" **DEPTH** 89cm | 35" **DIAMETER** 89cm | 35" **WEIGHT NETTO** 16kg | 35.27lbs **WEIGHT** 16kg | 35.27lbs

Packaging

wiDTH 104cm | 40.9" **HEIGHT** 104cm | 40.9" **CUBAGE** $1.12\text{m}^3 \mid 39.72\text{ft}^3$ **LENGTH** 104cm | 40.9"

Technical CE / CU

Stainless Steel Sphere (indoor use, not resistant to marine environemts) with PMMA lenses, wooden legs and leather straps

ENERGY LABEL LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED NUMBER OF LIGHTSOURCES

252 Yes

INPUT VOLTAGE FREQUENCY 120-250V 50/60

MAX POWER CONSUMPTION LAMPHOLDER

LED (Solid state) 26W

CABLE COLOUR LIFETIME 50000 hours Transparent with tinned cores

CABLE LENGTH

500cm | 196.9" In line dimmer switch integrated in power supply

housing

COLOUR TEMPERATURE CRI 2523 K (max) 92

LIGHT OUTPUT LIGHT DIRECTION All directions 1744 lm

DIMMING & LIGHTING CONTROL

Dimmer on power cord

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Dimmer on power cord

Compatible models: Raimond II Tensegrity, R61 CE, Raimond II Tensegrity, R61 CU, Raimond II Tensegrity, R89 CE, Raimond II Tensegrity, R89 CU